

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 991 293 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
03.05.2000 Bulletin 2000/18

(51) Int. Cl.<sup>7</sup>: H04Q 11/04

(43) Date of publication A2:  
05.04.2000 Bulletin 2000/14

(21) Application number: 99202137.8

(22) Date of filing: 01.07.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Caves, Keith  
Sawbridgeworth, Hertfordshire CM21 9LF (GB)

(30) Priority: 10.08.1998 GB 9817411

(74) Representative:  
Humphrey-Evans, Edward John et al  
Nortel Networks  
Intellectual Property Law Group  
London Road  
Harlow, Essex CM17 9NA (GB)

(71) Applicant:  
NORTEL NETWORKS CORPORATION  
Montreal, Quebec H2Y 3Y4 (CA)

(54) System to transport narrowband calls across an ATM network

(57) The use of multiple AAL2 virtual circuits to support narrow band calls with multiple types of narrow band signalling systems leads to inefficient use of bandwidths over an ATM network. The present invention provides a method of transporting narrow band calls of multiple narrow band signalling type between narrow

band networks across a single virtual circuit in an ATM network, where for each call connection within a circuit the call connection signalling information includes the narrow band signalling type.

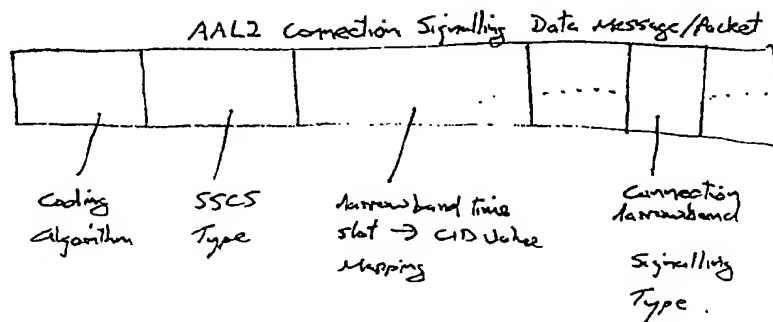


Fig 4.



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 20 2137

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	LIU S S: "IMPACTS OF SIGNALING-INTENSIVE LOCAL SERVICES (SILS) ON B-ISDN SWITCHING SYSTEMS: A SIMULATION STUDY" COMPUTER NETWORKS AND ISDN SYSTEMS, NL, NORTH HOLLAND PUBLISHING. AMSTERDAM, vol. 25, no. 2, 17 August 1992 (1992-08-17), pages 121-143, XP000296111 ISSN: 0169-7552 * page 122, column 1, line 30 - line 33; figure 1 * * page 141, column 2, line 24 - page 142, column 2, line 8; figure 26 *	1-6,8	H04Q11/04
Y	GB 2 305 812 A (NORTHERN TELECOM LTD) 16 April 1997 (1997-04-16) * page 5, line 4 - page 6, line 34; figures 2,6 *	1-6,8	
A	WO 98 24263 A (NORTHERN TELECOM LTD ;BRUECKHEIMER SIMON DANIEL (GB); HUMPHREY LES) 4 June 1998 (1998-06-04) * figure 5 *	7	<div>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</div> <div>H04Q</div>
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 6 March 2000	Examiner Gregori, S
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EP 0 991 293 A3 (P4C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 20 2137

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-03-2000

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2305812	A	16-04-1997	CA 2218868 A	10-04-1997
			EP 0852890 A	15-07-1998
			WO 9713389 A	10-04-1997
			JP 11513545 T	16-11-1999
-----				
WO 9824263	A	04-06-1998	EP 0941629 A	15-09-1999
-----				

EPO FORM P445

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 991 293 A2**

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
05.04.2000 Bulletin 2000/14

(51) Int. Cl.<sup>7</sup>: **H04Q 11/04**

(21) Application number: 99202137.8

(22) Date of filing: 01.07.1999

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: 10.08.1998 GB 9817411

(71) Applicant:  
**NORTEL NETWORKS CORPORATION**  
Montreal, Quebec H2Y 3Y4 (CA)


(72) Inventor: Caves, Kelth  
Sawbridgeworth, Hertfordshire CM21 9LF (GB)

(74) Representative:  
Humphrey-Evans, Edward John et al  
Nortel Networks  
Intellectual Property Law Group  
London Road  
Harlow, Essex CM17 9NA (GB)

### (54) System to transport narrowband calls across an ATM network

(57) The use of multiple AAL2 virtual circuits to support narrow band calls with multiple types of narrow band signalling systems leads to inefficient use of bandwidths over an ATM network. The present invention provides a method of transporting narrow band calls of multiple narrow band signalling type between narrow

band networks across a single virtual circuit in an ATM network, where for each call connection within a circuit the call connection signalling information includes the narrow band signalling type.

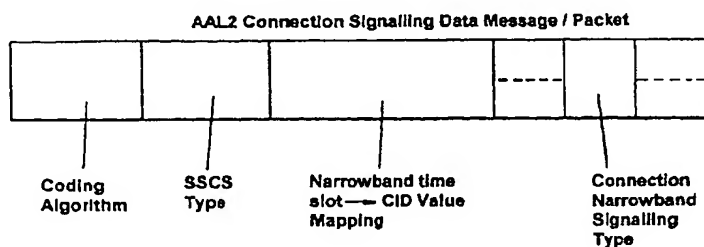

**Fig. 4**

EP 0 991 293 A2

## Description

## FIELD OF THE INVENTION

[0001] This invention relates to telecommunications networks and in particular a system and method for asynchronous transfer mode (ATM) transmission of traffic.

## BACKGROUND OF THE INVENTION

[0002] ATM technology is a flexible form of transmission which allows various types of service traffic, eg. Voice, video or data, to be multiplexed together onto a common means of transmission, the traffic being carried in cells each having a header indicating its destination. Service traffic is adapted typically into 53 byte cells comprising 5 byte headers and 48 byte payloads such that the original traffic can be reconstituted at the far end of the ATM network. This form of adaption is performed in the ATM adaption layer (AAL). The technique allows large volumes of traffic to be handled reliably and efficiently.

[0003] A limiting factor in the introduction of ATM is the difficulty of interfacing new broadband ATM networks with existing narrowband networks. The presently proposed AAL2 ATM trunking for narrowband services encapsulates and transports short user packages inside an ATM cell stream. AAL2 allows multiple narrowband users to share a single ATM virtual circuit: in this manner the length of each user package can be kept short to minimise packetisation delay, whilst the overall bandwidth efficiency of the VCC is maintained. However, as presently proposed, a single AAL2 virtual circuit can only support AAL2 connections which are controlled by the same type and variant of narrowband signalling system. In general, transmission facilities terminating on a single interworking function (IWF) may each carry a different narrowband signalling system, or a single transmission facility may carry multiple narrowband signalling systems. In either case, this requires the IWF to terminate and process multiple different narrowband signalling systems. This means that as presently proposed, in order to transport user data across the ATM network, the IWF would need to initiate multiple AAL2 virtual circuits, one for each narrowband signalling system terminated. At present it is not otherwise possible for the narrowband signalling handling function at the receiving IWF to determine which signalling system to associate with an individual narrowband call. This information is required so that the receiving IWF can successfully process the signalling information in order to provide onward routing of the call.

[0004] The use of multiple AAL2 virtual circuits to overcome this problem leads to an inefficient use of bandwidth, especially when an AAL2 virtual circuit has only a few calls to support.

## SUMMARY OF THE INVENTION

[0005] It is an object of the present invention to minimise or to overcome these disadvantages.

[0006] It is a further object of the present invention to provide an improved apparatus and method for the transport of narrowband communications traffic over ATM networks.

[0007] In a first aspect the present invention provides a method of transporting narrowband calls of multiple narrowband signalling type between first and second narrow band networks across a virtual circuit in an ATM network, wherein for each call connection within said circuit the call connection signalling information includes the narrowband signalling type.

[0008] Preferably the call connection signalling information is a data packet comprising a narrowband signalling type field.

[0009] In a second aspect the present invention provides a method of transporting narrowband calls of multiple narrowband signalling type between first and second narrow band networks across an ATM network; the method comprising:

forming a virtual circuit;

forming call connections within said circuit with a call connection signalling information data packet comprising a narrowband signalling type field containing the narrowband signalling type of said call.

[0010] In a third aspect the present invention provides an apparatus for transporting narrowband calls of multiple narrowband signalling type between first and second narrow band networks across an ATM network, the apparatus comprising:

means for forming a virtual circuit;

means for forming call connections within said circuit by forwarding a call connection signalling information data packet comprising a narrowband signalling type field containing the narrowband signalling type of said call.

[0011] In a fourth aspect the present invention provides an apparatus for transporting narrowband calls of different signalling type between first and second narrow band networks across an ATM network, the apparatus comprising:

means for forming a virtual circuit;

means for forming call connections within said circuit by receiving a call connection data packet comprising a narrowband signalling system type field containing the narrowband signalling system type of said call.

[0012] Preferably said means is an interworking function.

[0013] Preferably said virtual circuit is an AAL2 virtual circuit.

[0014] In a further aspect the present invention provides a telecommunications system for transporting narrowband calls of different signalling type between first and second narrow band networks across an ATM network, the system comprising:

means for forming a virtual circuit between two interworking functions (IWF);

means for forming call connections within said circuit by transferring between said IWFs a call connection data packet comprising a narrowband signalling system type field containing the narrowband signalling system type of said call.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0015] In order that a greater understanding of the invention can be obtained, an embodiment of the invention will now be described with reference to the accompanying drawings by way of example only and without intending to be limiting, in which:

- Figure 1 is a schematic diagram of a telecommunications system comprising narrowband services connected over an ATM network;
- Figure 2 is a schematic diagram showing virtual circuit connections between the ATM network IWF's;
- Figure 3 is a schematic diagram showing an AAL2 virtual circuit data stream; and
- Figure 4 is a schematic diagram illustrating an inventive AAL2 connection signalling packet within the AAL2 virtual circuit data stream.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

[0016] Figure 1 shows a telecommunications system comprising a plurality of narrowband networks 2 such as public switch telephone networks or wireless networks, connected by an ATM network 3. The narrowband networks 2 are connected to the ATM network 3 by narrowband transmission facilities 4 such as E1 or DS1, which terminate at the ATM network 3 in an interworking function (IWF) 5.

[0017] In the ATM network structure 3, narrowband channels are transported across the network 3 between pairs of IWF's 5, each providing an interface between the respective narrowband network transmission facility 4 and the ATM network 3, as shown in figure 2. The IWF 5 will process any incoming narrowband calls to determine a suitable outgoing route (to another IWF 5) as well as performing other functions such as compression and in the case of voice or voice band data calls suppressing silent intervals. The IWF 5 also performs an ATM adaption layer function using AAL type 2 to adapt

user data and signalling information into packets or minicells - said packets are multiplexed into the AAL2 virtual circuit (VC) for transport across the ATM network 3 to a receiving IWF5. Each user is allocated a unique channel within the AAL2 VC. The receiving IWF retrieves the packets and reassembles the narrowband call. In this way packets of user information from different users may be multiplexed onto a single AAL2 VC.

[0018] The narrowband signalling information, associated with each individual call being transported between IWF's 5 is similarly transported either in a given AAL2 channel within the AAL2 VC, or in a separate AAL5 VC, as shown schematically in Figure 2. This information is similarly retrieved by the receiving IWF's which provides information on the forward routing of a particular narrowband call for example. However the different types of variants of narrowband signalling systems used require the receiving IWF to be able to associate a particular narrowband call with the type of signalling system used to retrieve for example the required forward routing information to complete the call.

[0019] Upon set up of a VC, a channel is allocated for the narrowband signalling information associated with the calls to be transported by the newly set up VC, either within the VC itself (as a unique channel within the AAL2 VCC), or within a separate AAL5 VC.

[0020] In prior art arrangements as shown in phantom outline in figure 2, the association of narrowband calls with the type of signalling system in which the call was terminated at the sending IWF is achieved by the use of VCs which are dedicated to a particular signalling type. The receiving IWF's thus know that all calls received on a particular VC will be of a predetermined signalling type, this signalling information then being retrievable from the dedicated AAL2 VC or AAL5 VC channel allocated to it.

[0021] However, as described above, the use of separate VC's for each narrowband call signalling type leads to inefficient use of the VC's and hence inefficient use of bandwidth within the ATM network, especially when an AAL2 VC has only a few calls of a given signalling type to support. The invention achieves much greater multiplexing gain by combining all narrowband calls, irrespective of their associated narrowband signalling system, onto the same AAL2 VC, as shown in figure 2 by the solid line circuits.

[0022] Figure 3 shows an AAL2 VC data stream which, for the purposes of illustration only, comprises a channel 1 dedicated to AAL2 connection control signalling messages for setup and termination of calls within the VC; a channel 2 dedicated to carrying (for example) a Common Channel Signalling (CCS) channel to provide the narrow band signalling for the narrowband calls terminating at the sending IWF which support this type of signalling. The other channels shown comprise user data from the various narrowband calls transported by the VC.

[0023] AAL2 connection control signalling concerned with the control of individual AAL2 connections within a AAL2 VC is also used to forward information about a connection to set up the receiving IWF5. This connection control signalling takes the form of a set up message sent on a dedicated channel within the AAL2 VC or a separate AAL 5 VC. AAL2 connection control signalling is concerned with conveying the identities of the channels occupied by the individual AAL2 connections, as well as with other AAL2 parameters necessary for correct operation of the sending and receiving IWFs, for example the identification of the voice coding algorithm to be used on the call. These connection control signalling messages are used during the set up and release phases of individual AAL2 connections.

[0024] Figure 4 shows the field and format arrangement for AAL2 connection control signalling messages of the invention and includes; information on the coding algorithm to be used during the call; the SSCS type of a call; the call timeslot to channel identification value mapping information; the narrowband call signalling type information. The mapping information allows the destination IWF to reassemble timeslot by timeslot the narrowband call for forwarding via a narrowband transmission facility 4 (eg E1 or DS1) to the connected narrowband network 2. The narrowband call signalling type information allows the IWF to associate the correct narrowband signalling information with the new call, by being directed to the channel previously set up for transport of the signalling information. Some narrowband signalling systems include the information inband (ie as part of the user data), and use of this signalling system can also be conveyed to the receiving IWF.

Use of narrowband signalling type information in the AAL2 signalling allows the carrying on a single AAL2 VC of narrowband calls with different narrowband signalling systems. This extra information field conveys the type and variant of narrowband signalling associated with a given AAL2 connection. This information is conveyed by the AAL2 connection control signalling at AAL2 connection set up time to the receiving IWF. The AAL2 connection control signalling function at the receiving IWF then transfers this narrowband signalling information to the narrowband signalling handling function, which is then provided with the per-call information that it requires to correctly determine which narrowband call is associated with which type and variant of narrowband signalling system, regardless of how many different signalling systems are in use for a given AAL2 VC. A single AAL2 VC is thus enabled to carry narrowband calls associated with multiple different narrowband signalling systems.

[0025] In use, VCs are set up within the ATM network 3 between IWFs 5 which are in turn connected to a narrowband network 2 by narrowband transmission facilities 4. Upon set up of a VC, a channel is allocated for AAL2 signalling for individual call set up within the VC, a channel is also allocated for each type of narrowband

signalling system call envisaged to be provided for within the VC. Once the VC is set up, narrowband calls routed along it are first set up using the AAL2 connection message protocol as described above with reference to figure 4, detailing the mapping of the call timeslot on the narrowband transmission facility 4 to the channel value to be used for this timeslot as well as the narrowband call signalling system type. Once the call connection is set up, the call user data is placed on to the AAL2 VC and transported across the ATM network 3 to the receiving IWF, which is enabled to retrieve the call user data as well as the narrowband signalling associated with the call using the AAL2 connection message information as described above.

The foregoing describes the invention including a preferred form thereof. Alterations and modifications as will be obvious to those skilled in the art are intended to be incorporated within the scope hereof.

## Claims

1. A method of transporting narrowband calls of multiple narrowband signalling type between first and second narrow band networks across a virtual circuit in an ATM network, wherein for each call connection within said circuit the call connection signalling information includes the narrowband signalling type.
2. A method as claimed in claim 1 wherein the call connection signalling information is a data packet comprising a narrowband signalling type field.
3. A method of transporting narrowband calls of multiple narrowband signalling type between first and second narrow band networks across an ATM network; the method comprising:
  - forming a virtual circuit;
  - forming call connections within said circuit with a call connection signalling information data packet comprising a narrowband signalling type field containing the narrowband signalling type of said call.
4. An apparatus for transporting narrowband calls of multiple narrowband signalling type between first and second narrow band networks across an ATM network, the apparatus comprising:
  - means for forming a virtual circuit;
  - means for forming call connections within said circuit by forwarding a call connection signalling information data packet comprising a narrowband signalling type field containing the narrowband signalling type of said call.
5. An apparatus for transporting narrowband calls of

different signalling type between first and second narrow band networks across an ATM network, the apparatus comprising:

means for forming a virtual circuit; 5  
means for forming call connections within said circuit by receiving a call connection data packet comprising a narrowband signalling system type field containing the narrowband signalling system type of said call. 10

6. An apparatus as claimed in claim 4 or 5, wherein said means is an interworking function
7. An apparatus as claimed in any one of claims 4, 5 15  
or 6, wherein said virtual circuit is an AAL2 virtual circuit.
8. A telecommunications system for transporting narrowband calls of different signalling type between 20  
first and second narrow band networks across an ATM network, the system comprising:

means for forming a virtual circuit between two interworking functions (IWF); 25  
means for forming call connections within said circuit by transferring between said IWFs a call connection data packet comprising a narrowband signalling system type field containing the narrowband signalling system type of said call. 30

35


40

45


50

55




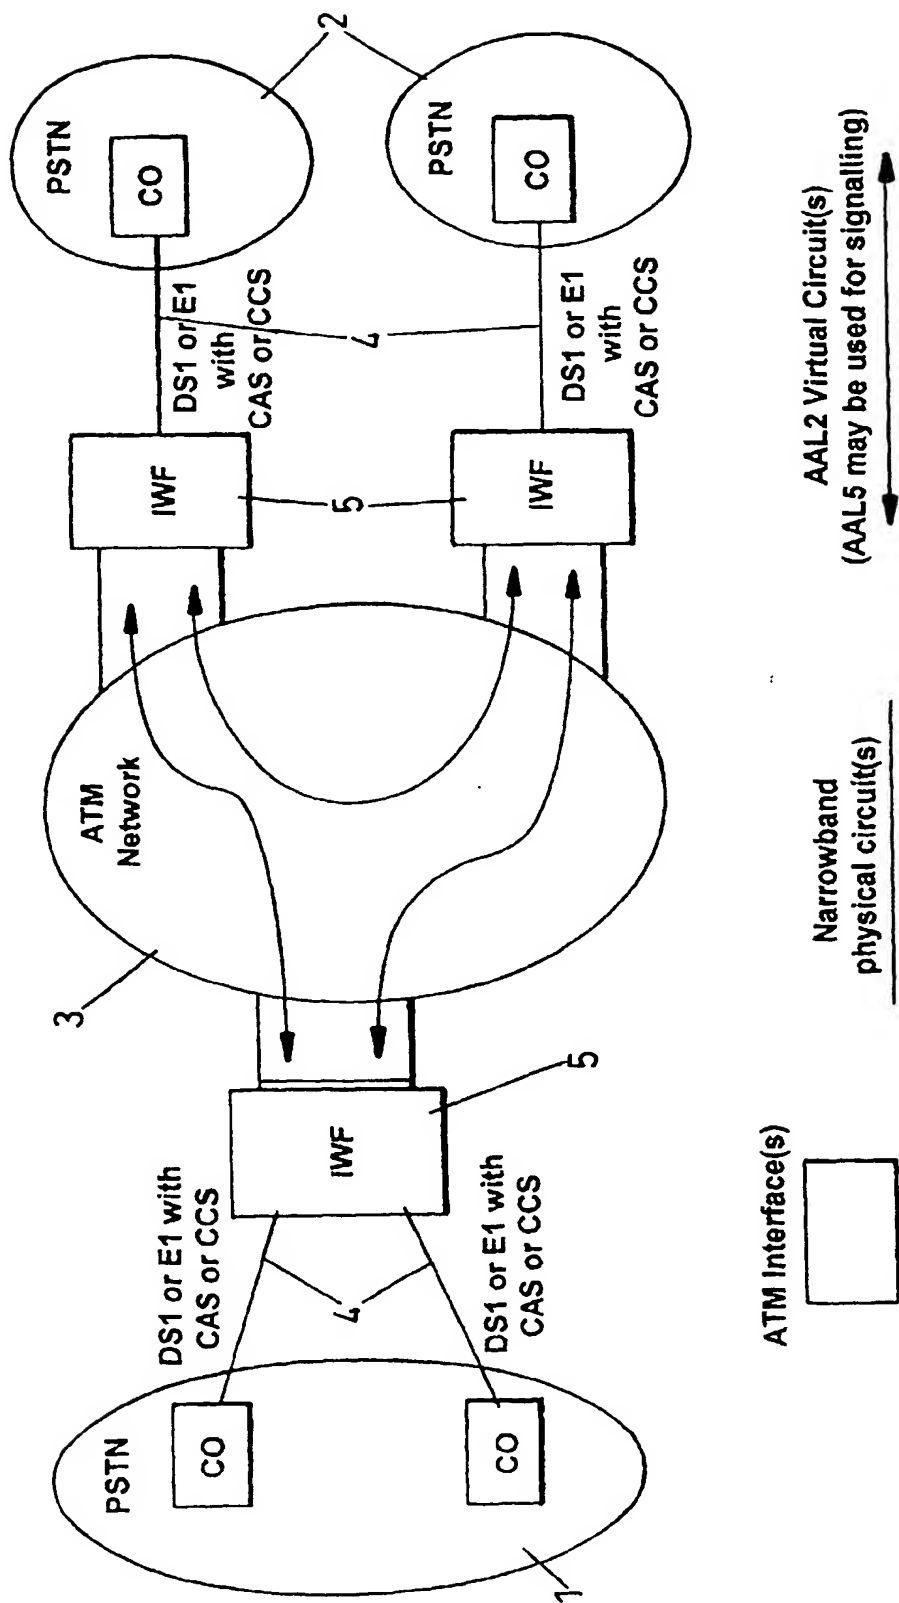


**Fig. 1**

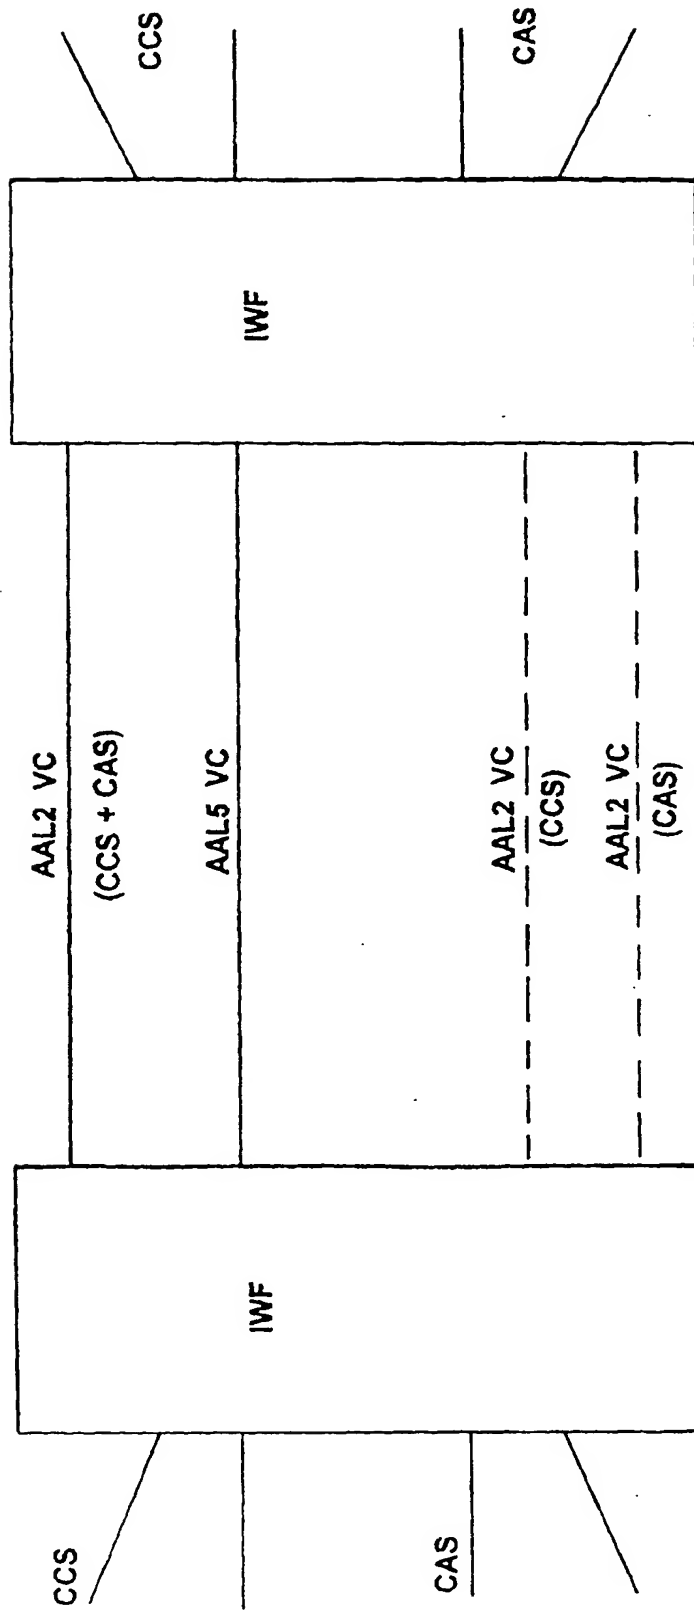

*Fig. 2*

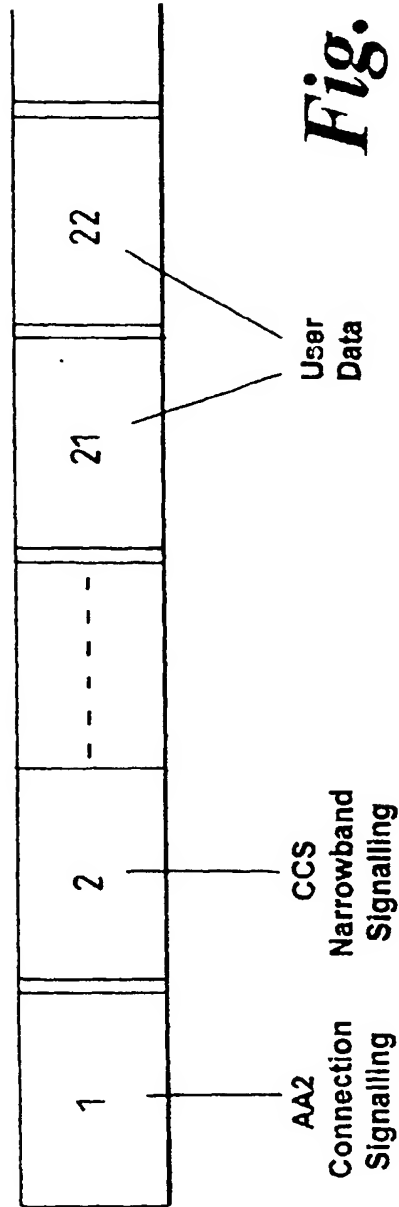

**Fig. 3**

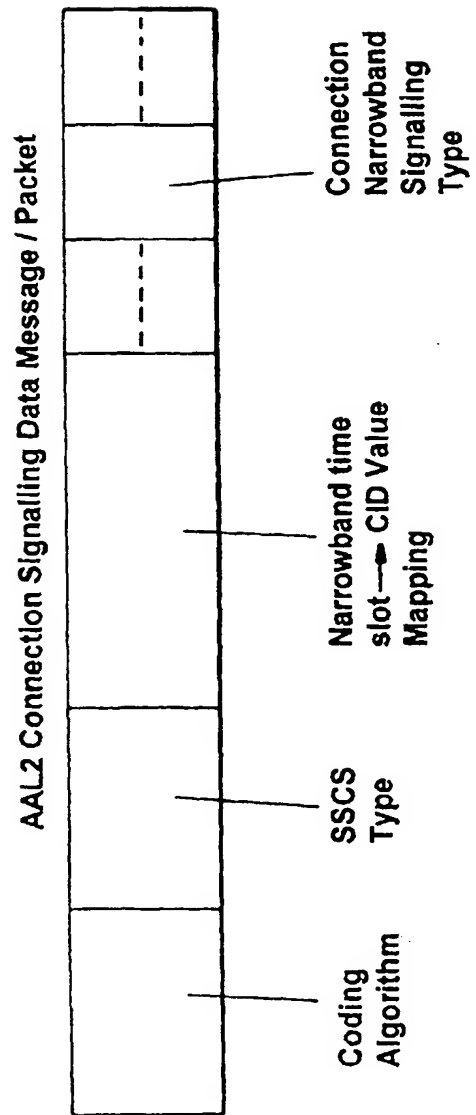

**Fig. 4**